

INSTALLATION INSTRUCTIONS ARSENAL STRIKE ONE

1. Remove the factory guide rod according to the pistol manufacturer's instructions
2. Place one of the external springs on the recoil rod. Guide the external spring with the fingers (Fig. 1) as you push the rod and place on the barrel (Fig. 2).
3. Attention for the correct placement of the recoil rod head on the barrel half cycle (Fig. 3,4).
4. Assemble the slide on the frame and rack a few times to confirm that the DPM Recoil Reduction System is installed correctly and the pistol operates unrestricted.

Attention sometimes after the assembly the recoil rod may stick out more than normal (Fig. 5). With a gently blow on the top of the slide, the system will move back to the correct position in the frame (Fig. 6).

Fig. 1


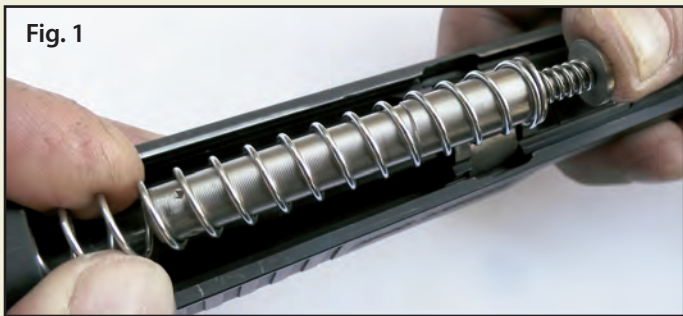


Fig. 2





For any Questions about the Installation or Operating instructions:
service@dpmssystems.com | www.dpmssystems.com/1911